


UBI WORLD TV – UEC STB – OPTUS D2 SETTINGS

This guide will assist you to setup the UEC STB on Optus D2


UBI HOME TRANSPONDER

FREQUENCY	12644
SYMBOL RATE	22500
POLARISATION	HORIZONTAL
FEC	3/4

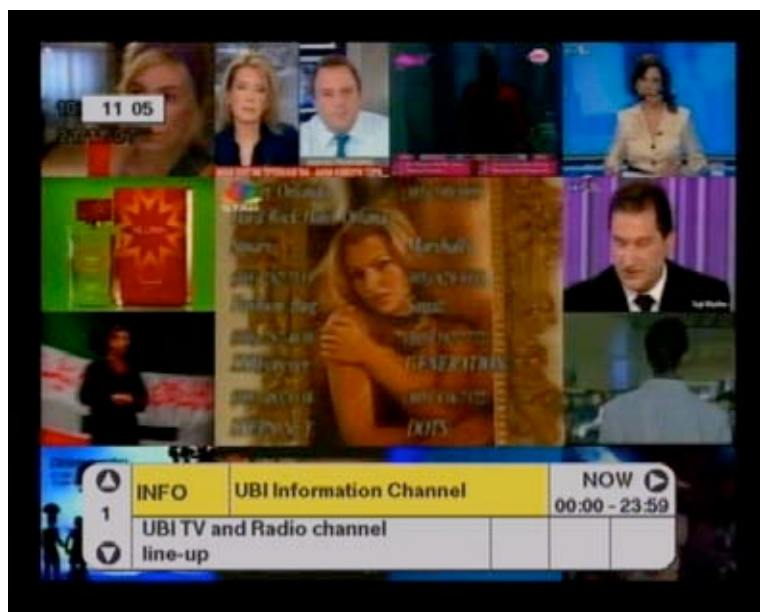


STEP 1

START ON ANY UBI CHANNEL

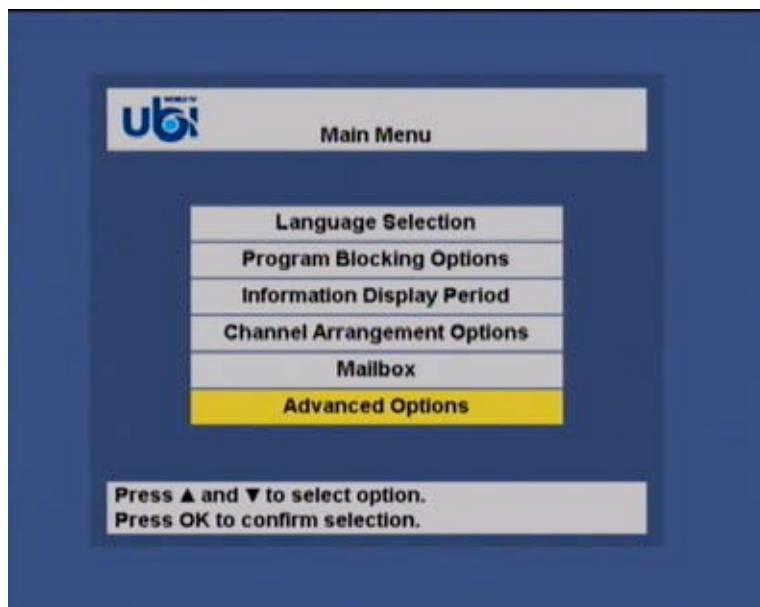


STEP 2

- PRESS **MENU**
- SCROLL DOWN TO **ADVANCED OPTIONS**
- PRESS **OK**

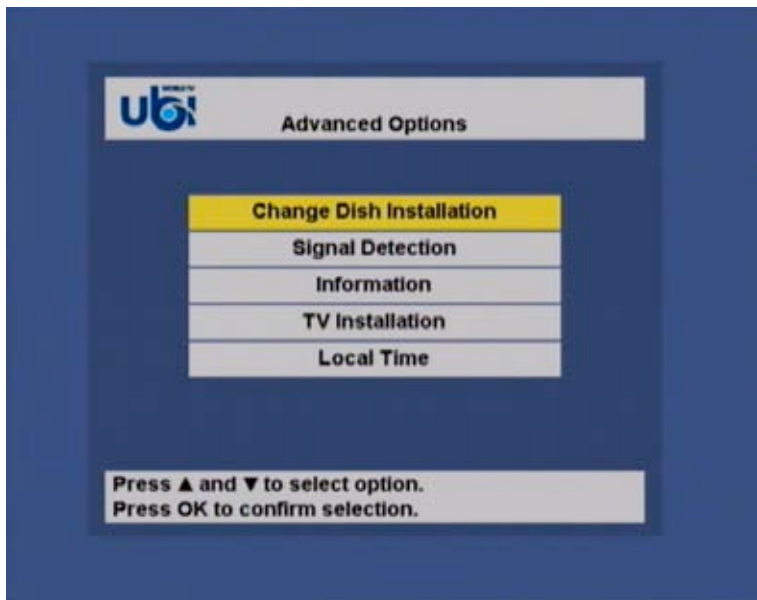

STEP 3


- PRESS **OK** ON **CHANGE DISH INSTALLATION**

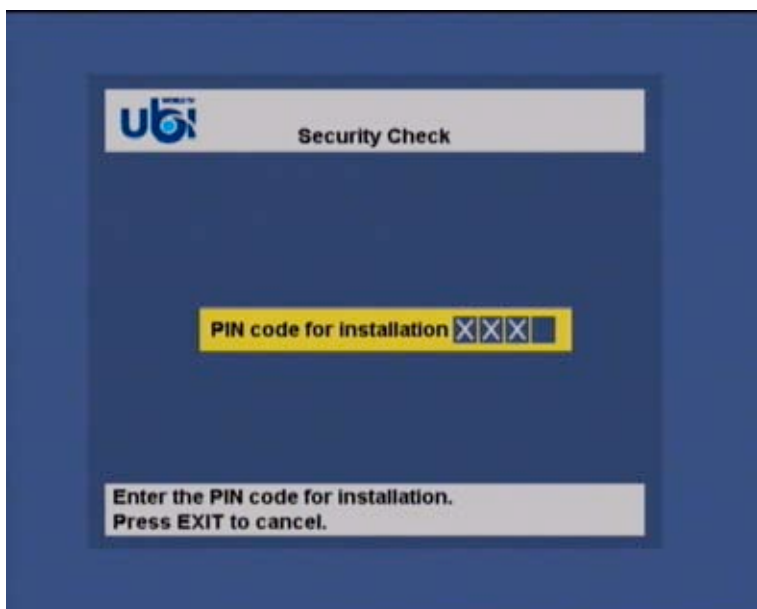

STEP 4


TYPE IN PIN CODE **8 2 7 2**

IF YOU MAKE A MISTAKE PRESS THE LEFT ARROW TO DELETE THE WRONGLY ENTERED NUMBER

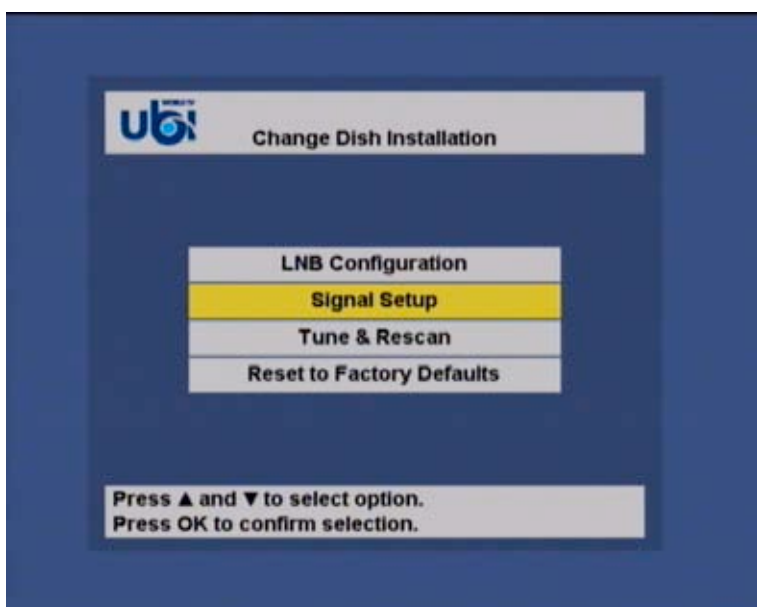

STEP 5


- SCROLL DOWN TO **SIGNAL SETUP**
- PRESS **OK**

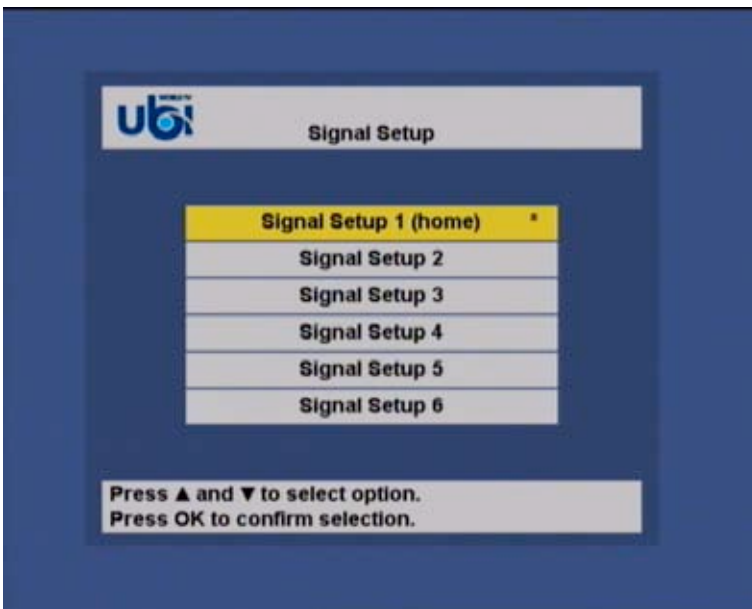

STEP 6

- PRESS **OK** ON **SIGNAL SETUP 1 (home)**

SIGNAL SETUP 1 (home) IS FOR UBI

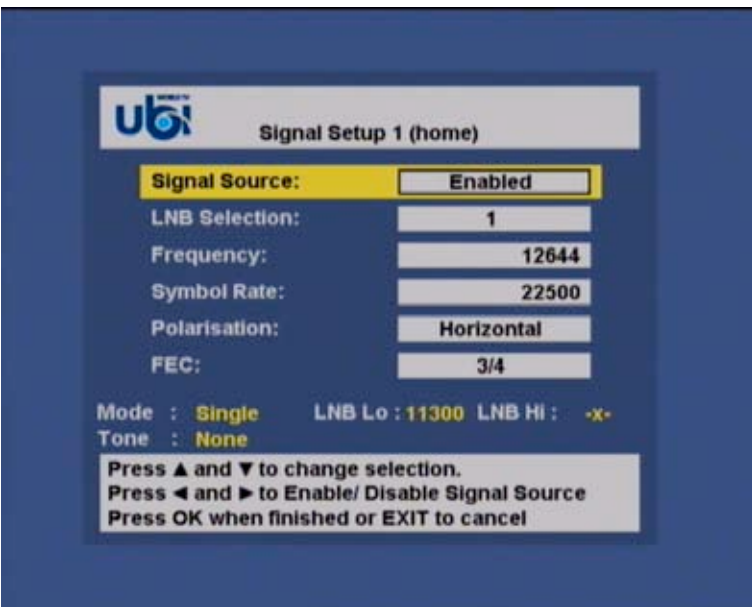


STEP 7

ENTER THE NEW UBI SETTINGS

SIGNAL SOURCE	ENABLED
FREQUENCY	12644
SYMBOL RATE	22500
POLARISATION	HORIZONTAL
FEC	3/4

PRESS **OK**

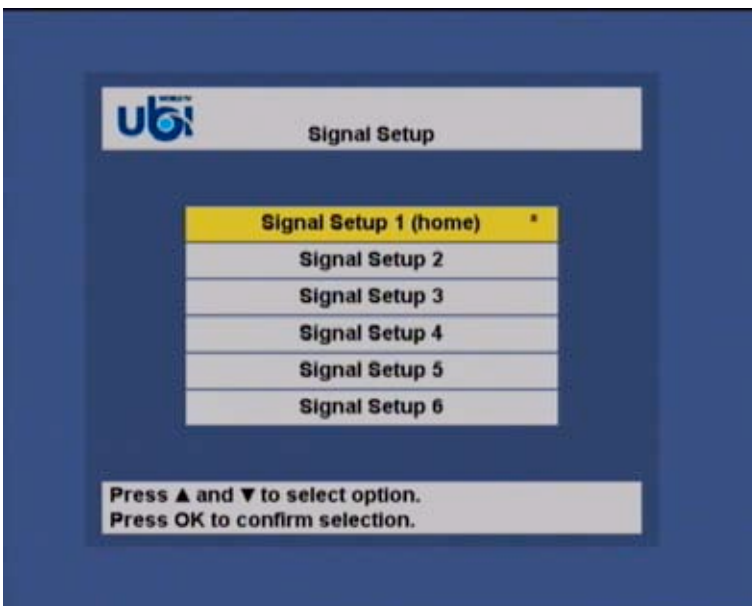


STEP 8

ONLY **SIGNAL SETUP 1 (home)** HAVE AN ASTREIX * NEXT TO IT


THIS MEANS THAT ONLY UBI IS ENABLED

PRESS **EXIT**

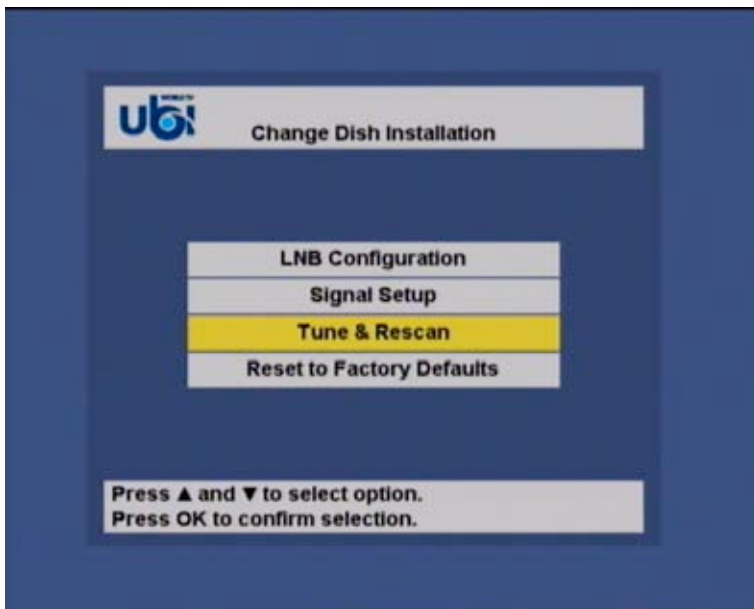


STEP 9

- SCROLL DOWN TO **TUNE & RESCAN**
- PRESS **OK**

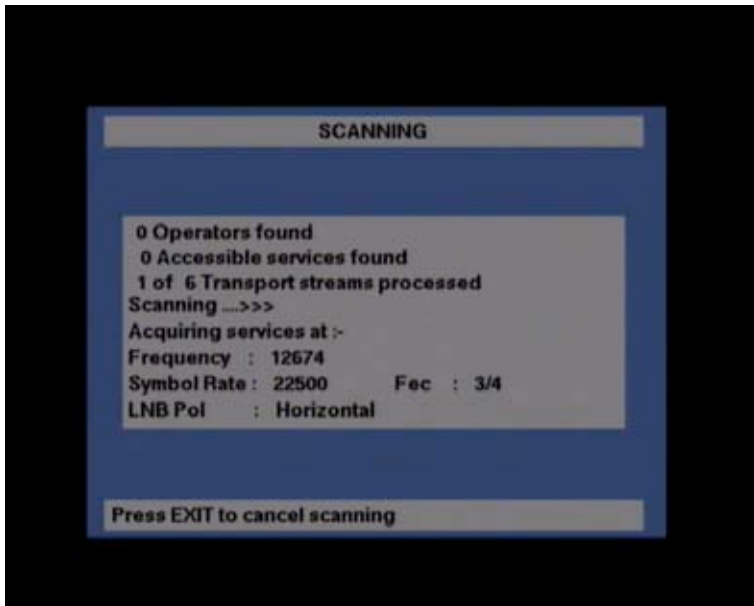

STEP 10

BE PATIENT WHILE THE **SCANNING** TAKES PLACE

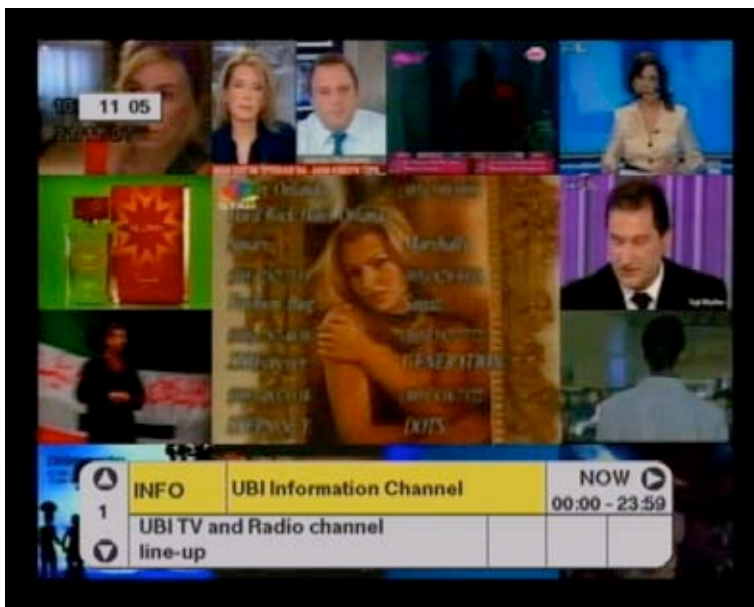

STEP 11

IF ALL WENT OK THEN A UBI CHANNEL WILL APPEAR